
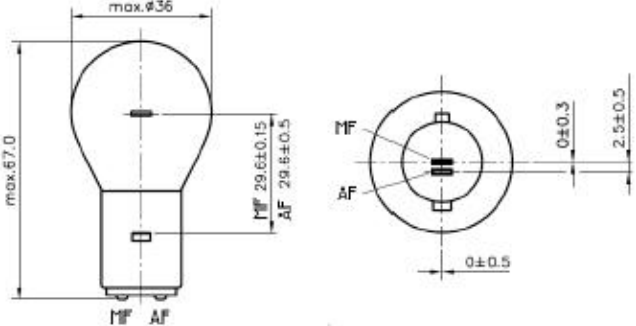


# Product Information Sheet



Railway Signaling		Technical Details	
	<b>Type RS6835</b> <b>12V 20/20W BA20d</b>	<b>Type</b>	RS6835
	<b>Ordering – No.</b> <b>46835</b>	<b>Rated Voltage (V)</b>	12
<b>Product Description</b>	Signaling Lamp	<b>Wattage (W) (at 1,7A) (MF/AF)</b>	max. 22,0 / 22,0
<b>Features</b>	Double Filament	<b>Luminous Flux (lm) (at 1,7A) (MF/AF)</b>	350 / 350
<b>Applications</b>	Railway Signal	<b>Average Lifetime (h) (at 1,7A) (MF/AF)</b>	600 / 50
<b>Drawing (in mm)</b> 		<b>Base</b>	BA20d
		<b>Maximum Overall Length (mm)</b>	max. 67,0
		<b>Bulb Diameter (mm)</b>	max. 36,0
		<b>Light Center (mm)</b>	MF 29,6 ± 0,15 AF 29,6 ± 0,5
		<b>Filament Distance (mm) MF-AF</b>	2,5 ± 0,5
		<b>Packaging Configuration</b>	200 pcs.
<b>Environmental Remark</b>		Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".	

[www.german-lamps.eu](http://www.german-lamps.eu)

[www.ventas-focos-itt360.com](http://www.ventas-focos-itt360.com)